

# APPLICATION GUIDE ECOFIX<sup>®</sup>

January 2015  
Revision of January 2015

## **STORAGE**

Very important: maximum storage temperature of Ecofix<sup>®</sup> is 20 °C.

## **PREPARATION**

Oil and grease shall be removed by solvent cleaning prior to application. Use dry wiping and scraping to remove heavy deposits of oil and grease followed by localised wiping with clean rags dampened with solvent. Avoid spread of contaminants.

The surface shall be rough to secure sufficient adhesion. The surface profile shall be minimum 75 microns (Rz).

## **MATERIAL MIXING**

Ecofix<sup>®</sup> is a two-component coating. The quantity of catalyst used is 2% for application. Ecofix<sup>®</sup> cures by chemical reaction, which starts as soon as catalyst is added and then proceeds quite quickly.

The correct quantity of catalyst is included. Open the tube of catalyst, add to the Ecofix<sup>®</sup>, and mix by hand.

## **CLEANING**

Recommended cleaning solvent for tools used is Acetone.


## **APPLICATION**

Use the included spatula to fill the pitting by hand movement. An additional layer may be required (counter direction) to fill up the surface thoroughly. Curing time will be approximately 60 minutes, depending on ambient temperature and thickness of the applied Ecofix<sup>®</sup>.

## **ECOSHIELD<sup>®</sup>**

When Ecofix<sup>®</sup> is properly cured Ecoshield<sup>®</sup> can be applied on top according to the *ECOSHIELD APPLICATION GUIDE*.

Ecofix<sup>®</sup> is a registered brand name of Subsea Industries NV  
Haven 29, Noorderlaan 9, 2030 Antwerp, Belgium  
☎: +32 3 213 53 18 📠: +32 3 213 53 21  
info@ecospeed.be - www.ecospeed.be

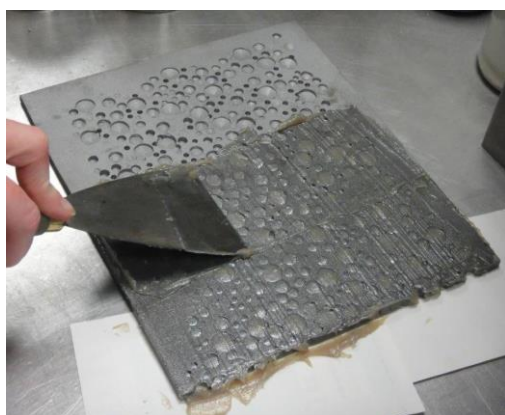

Application of Ecofix<sup>®</sup>



Ecofix<sup>®</sup> applied – additional application counter direction is required in order to fill all pitting

## QUALITY CONTROL

**Ecofix**<sup>®</sup> should not be applied when humidity is above 85%.

**Ecofix**<sup>®</sup> should not be applied when the temperature of the steel at the coldest point is less than 3 °C above the dew point.

**Ecofix**<sup>®</sup> should not be applied when the temperature of the steel surface is 60 °C or higher.

**Ecofix**<sup>®</sup> should not be applied when the surface temperature of the material to be coated is less than 0 °C.

---

## LIMITATION OF LIABILITY

The information in the data sheet is based upon laboratory tests we believe to be accurate and is intended for guidance only. All recommendations or suggestions relating to the use of the Subsea Industries products, whether in technical documentation, or in response to a specific enquiry, or otherwise, are based on data which to the best of our knowledge are reliable. The products and information are designed for users having the requisite knowledge and industrial skills and it is the end-user's responsibility to determine the suitability of the product for its intended use.

Subsea Industries has no control over either the quality or condition of the substrate, or many factors affecting the use and application of the product. Subsea Industries does therefore not accept any liability arising from loss, injury or damage resulting from such use or the contents of this data sheet (unless there are written agreements stating otherwise).

The data contained herein are liable to modification as a result of practical experience and continuous product development.

This data sheet replaces and annuls all previous issues and it is therefore the user's responsibility to ensure that this sheet is current prior to using the product.

The English text of this document shall prevail over any translation thereof.

---